

A modern interior space with a large window, two white armchairs, a small table, and a potted tree. The room is minimalist and bright, with a light-colored floor and walls. The window offers a view of the outdoors. The text 'INVISABOARD' is overlaid in the center.

INVISABOARD

BUILT
BOARDS

2021 CATALOGUE



Built Boards
is proud to announce
the first True Flush
sub board.

Introducing: The InvisaBoard

"True Flush" mounting removes the once unsightly, unnecessary utility "poking out" in hallways across the country.

With a two stage install system, the mounting enclosure is fitted before plastering and the door kit is then plaster trowelled in - leaving minimalist clean lines and a flat finish.

We also have an optional extra door frame kit which can be surface fitted without the need of being trowelled in, if required.

The enclosure is available in two standard sizes 13 pole and 26 pole.
70MM minimum stud depth required. All steel solid construction.

INSTALLATION SUMMARY

- Install mounting box to studs
- Plaster over
- Cut-out and fit door kit
- Stop up and trowel trim

Full detailed installation instructions available at
builtboards.com.au/install



Optional | Surface Fit Door Kit


INVISABOARD 13 POLE SPECS

COLOUR:	PRIMED IN WHITE, READY FOR PAINTING
CAPACITY/POLE:	13 POLE 1 x DIN RAIL
FINISHED SIZE:	335MM W x 290MM H
MOUNTING:	MINIMUM 70MM STUD DEPTH & 10-20MM WALL BOARD THICKNESS
EARTH AND NEUTRAL BARS:	12P + 2 MAIN TUNNELS UP TO 16MM ²
LOCATION:	INDOOR IP30
CONSTRUCTION:	1.0MM STEEL SHEET
MECHANICAL PROTECTION:	2.0MM STEEL PLATE
STANDARDS:	AS/NZS IEC 60670.1:2012
MIN TEMP:	-5 DEGREES CELSIUS
MAX TEMP:	+60 DEGREES CELSIUS
MAX CURRENT:	80 AMPS
RATED VOLTAGE:	230V/415V AC 50Hz

PART NUMBERS:	
BBINVISA13	13 POLE INVISABOARD TRUE FLUSH SUB BOARD PLASTER IN KIT
BBINVISA13SMD	13 POLE DOOR KIT — SURFACE FIT DOOR KIT TO SUIT INVISABOARD 13 POLE (OPTIONAL)

SUPPLIED
ACCESSORIES:

ALL FIXINGS
6 POLE, POLE FILLER
8 x 32MM SNAP BUSHING
CIRCUIT INDICATION STICKER KIT
MECHANICAL PROTECTION PLATE

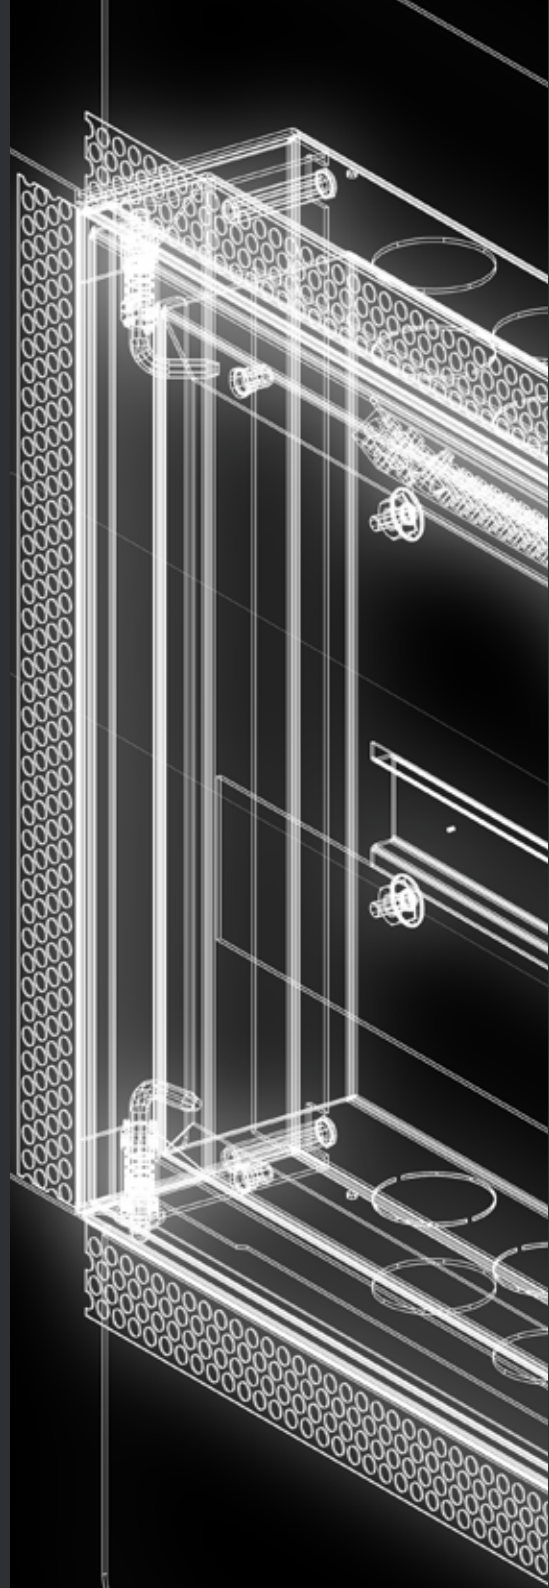

INVISABOARD 26 POLE SPECS

COLOUR:	PRIMED IN WHITE, READY FOR PAINTING
CAPACITY/POLE:	26 POLE 2 x DIN RAILS
FINISHED SIZE:	395MM W x 435MM H
MOUNTING:	MINIMUM 70MM STUD DEPTH & 10-20MM WALL BOARD THICKNESS
EARTH AND NEUTRAL BARS:	18P + 2 MAIN TUNNELS UP TO 16MM ²
LOCATION:	INDOOR IP30
CONSTRUCTION:	1.0MM STEEL SHEET
MECHANICAL PROTECTION:	2.0MM STEEL PLATE
STANDARDS:	AS/NZS IEC 60670.1:2012
MIN TEMP:	-5 DEGREES CELSIUS
MAX TEMP:	+60 DEGREES CELSIUS
MAX CURRENT:	80 AMPS
RATED VOLTAGE:	230V/415V AC 50Hz

PART NUMBERS:	
BBINVISA26	26 POLE INVISABOARD FLAT SUB BOARD PLASTER IN KIT
BBFINVISA26SMD	26 POLE DOOR KIT — SURFACE FIT DOOR KIT TO SUIT INVISABOARD 26 POLE (OPTIONAL)

SUPPLIED
ACCESSORIES:

ALL FIXINGS
6 POLE, POLE FILLER
12 x 32MM SNAP BUSHING
CIRCUIT INDICATION STICKER KIT
MECHANICAL PROTECTION PLATE



Optional | Surface Fit Door Kit

COMBINATION
NBN ENCLOSURE
PART# BBNBNSB24

Combination 24 pole sub board and NBN Enclosure.

With the combination of two enclosures which reduces installation time and visual clutter.

Professional finish with no locks or handles giving a streamlined look


Flush Mounting is a 2 step process with the mounting enclosure to be installed at frame stage and finished after wall lining has occurred.

This enclosure cannot be recessed after wall lining/plastering. Surface mount with optional BBNBNSB24SM trim Kit.

Full instructions available online at builtboards.com.au/install

SPECS

FLUSH FINISHED SIZE	DOOR 1065MM H x 475MM W x 45MM D
SURFACE MOUNT	FINISHED SIZE 1170MM H x 490MM W x 135MM D
ENCLOSURE MATERIAL	1MM SHEET METAL
DOOR	2MM ALUMINIUM
CABLE ENTRY	- 4 x 26MM, 3 x 38MM KNOCKOUTS TO TOP - 6 x 38MM KNOCKOUTS TO LEFT SIDE
MOUNTING	- RECESS SIZE IS 405MM WIDE BETWEEN STUDS AND 1005MM HIGH - OR SURFACE WITH BBNBNSB24SM - MOUNTING BRACKET SOLD SEPARATELY
COLOUR	- WHITE - 630MM x 300MM SIZE GEAR TRAY MOUNTING FOOTPRINT
DOOR CATCH	MAGNETIC
DOOR SWING	RH HINGED, CAN BE FIELD REVERSED
SUB BOARD SECTION	- EARTH & NEUTRAL BARS 18 POLE + 2 MAIN TUNNELS UP TO 16MM² - 2 x ROWS OF 12 POLE DIN RAIL
COMPLIANCE	COMPLIANT TO NBN CO NBN-DES-STD-0011

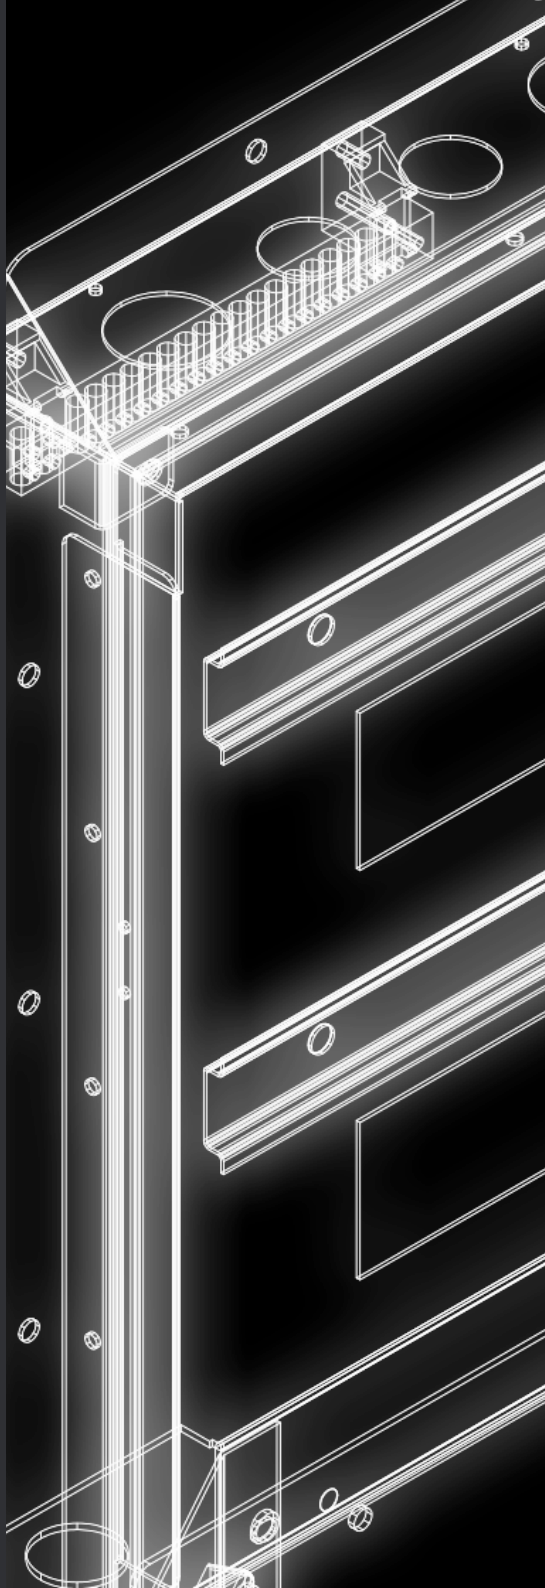


Flush Mounting is a two step process with the main enclosure to be installed at frame stage and finished after wall lining has occurred. This enclosure cannot be recessed after wall lining.

Surface mount with optional BBNBNSB24SM trim kit.



- Supplied with a double power point, 6 Gang grid plate and 6 CAT6 outlets
- Strong construction
- Lightweight aluminium door
- Compliant to NBN Co NBN-DES-STD-001

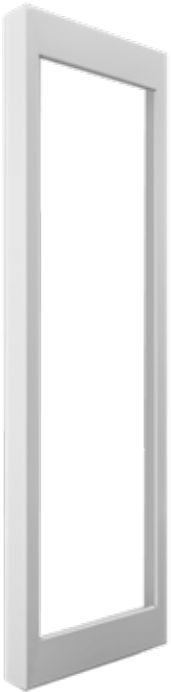

Surface mounted using BBNBNSB24SM Kit

NBN ENCLOSURE
PART# BBNBNV1

Purpose built and fully compliant, our NBN Enclosure is the cabinet of choice for those working with the Australian NBN rollout.

For fast installs, all NBN Enclosures come with a double GPO and 6 Gang CAT 6 outlet pre-loaded.

- Supplied with a double power point, 6 Gang grid plate and 6 CAT6 outlets
- Strong construction
- Printed gear tray
- WiFi friendly
- Upper and lower vents
- 2 x chrome padlockable knobs
- 32MM knockouts top and rear
- Rear entry window
- Compliant to NBN Co NBN-DES-STD-0011

OPTIONAL TRIM KIT – P/N: BBNBNFK

SPECS

ENCLOSURE	MATERIAL 1.2MM SHEET METAL
ACCESSORIES	1 X DOUBLE POWER POINT, 1 x 6 GANG GRID PLATE, 6 x CAT6 OUTLETS AND 1 x BLANK PLATE
GEAR	TRAY 2MM POWDER COATED AND PRINTED
DOOR LOCK	2 x CHROME PAD LOCKABLE TURN KNOBS
CABLE ENTRY	7 x 32MM KNOCKOUTS TO TOP AND REAR ACCESS HOLE
MOUNTING	SURFACE OR RECESS
SIZE	700MM H x 400MM W x 150MM D
VENTILATION	UPPER AND LOWER VENTS TO DOOR
COLOUR	POWDER COATED IN WHITE
CONSTRUCTION	FOLDED AND WELDED
WIFI WIFI FRIENDLY, INDEPENDENTLY TESTED BY AUSTEST LABORATORIES. REPORT AVAILABLE ON REQUEST COMPLIANCE EXCEEDS THE MINIMUM REQUIREMENTS OF THE NBN CO GUIDELINE NBN-DES-STD-0011	
ORDERING INFORMATION	BBNBNV1 NBN ENCLOSURE COMPLETE KIT
	BBNBNFK RECESS TRIM KIT



- Supplied with a double power point, 6 Gang grid plate and 6 CAT6 outlets
- Strong construction
- Printed gear tray
- WiFi friendly
- Upper and lower vents
- 2 x chrome padlockable knobs
- 32MM knockouts top and rear
- Rear entry window
- Compliant to NBN Co NBN-DES-STD-0011



Flush mounted trim fitted to
hide cutout • optional BBNBNFK



Supplied complete ready to install



32MM knockouts and rear entry window



Surface mount or flush installation



Optional trim kit for flush mount installation

NBN ENCLOSURE WITH
ADDED CONSUMER SPACE
PART# BBNBNXL


Supplied with a 2 x double power points, 2 x 6 Gang grid plates and 12 x CAT6 outlets.

- Printed gear tray
- WiFi friendly
- Strong construction
- 32MM knockouts top and rear
- Rear entry window
- 2 x Chrome pad lockable knobs
- Upper and lower vents
- Compliant to NBN Co NBN-DES-STD-0011

OPTIONAL TRIM KIT – P/N: BBNBNXLFK

SPECS

ENCLOSURE	MATERIAL 1.2MM SHEET METAL
ACCESSORIES	2 x DOUBLE POWER POINTS, 2 x 6 GANG GRID PLATES, 12 x CAT6 OUTLETS AND 2 x BLANK PLATES
GEAR	POWDER COATED AND PRINTED
DOOR LOCK	2 x CHROME PAD LOCKABLE TURN KNOBS
CABLE ENTRY	7 x 32MM KNOCKOUTS TO TOP AND REAR ACCESS HOLE
MOUNTING	SURFACE OR RECESS
SIZE	1000MM H x 400MM W x 150MM D
VENTILATION	UPPER AND LOWER VENTS TO DOOR
COLOUR	POWDER COATED IN WHITE
CONSTRUCTION	FOLDED AND FULLY WELDED
WIFI WIFI FRIENDLY. INDEPENDENTLY TESTED BY AUSTEST LABORATORIES. REPORT AVAILABLE ON REQUEST COMPLIANCE EXCEEDS THE MINIMUM REQUIREMENTS OF THE NBN CO GUIDELINE NBN-DES-STD-0011	
ORDERING INFORMATION	BBNBNXL NBN ENCLOSURE COMPLETE KIT
	BBNBNXLFK RECESS TRIM KIT

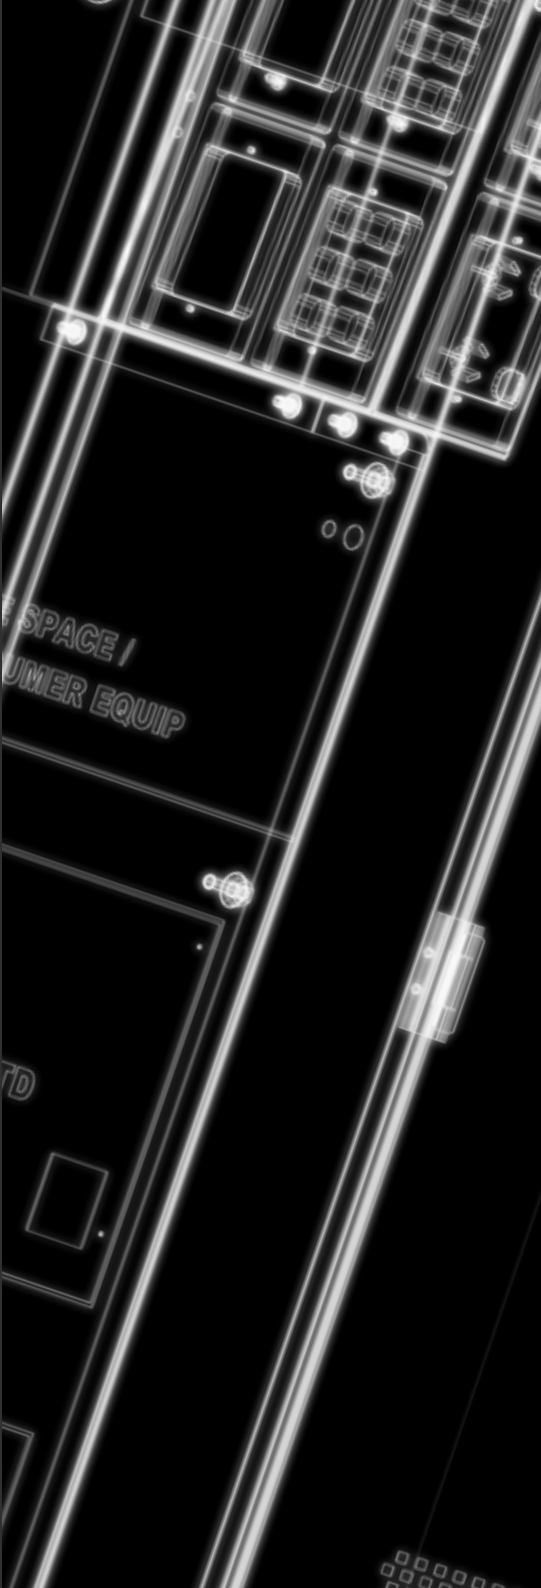

- Supplied with a 2 x double power points, 2 x 6 Gang grid plates and 12 x CAT6 outlets
- Printed gear tray
- WiFi friendly
- Strong construction
- 32MM knockouts top and rear
- Rear entry window
- 2 x Chrome padlockable knobs
- Upper and lower vents
- Compliant to NBN Co NBN-DES-STD-0011



Flush mounted trim kit to hide cutout
- optional BBNBNXLFK



Surface mount or flush installation




Supplied complete ready to install



Optional trim kit for flush mounted installation BBNBNXLFK

BUILT BOARDS AUTOMATION ENCLOSURES


Made in Australia to Australian standards, our switchboards are a must for any electrician who is serious about the home automation hardware they are installing. Refer to the quick selection guide below and find out more details overleaf.

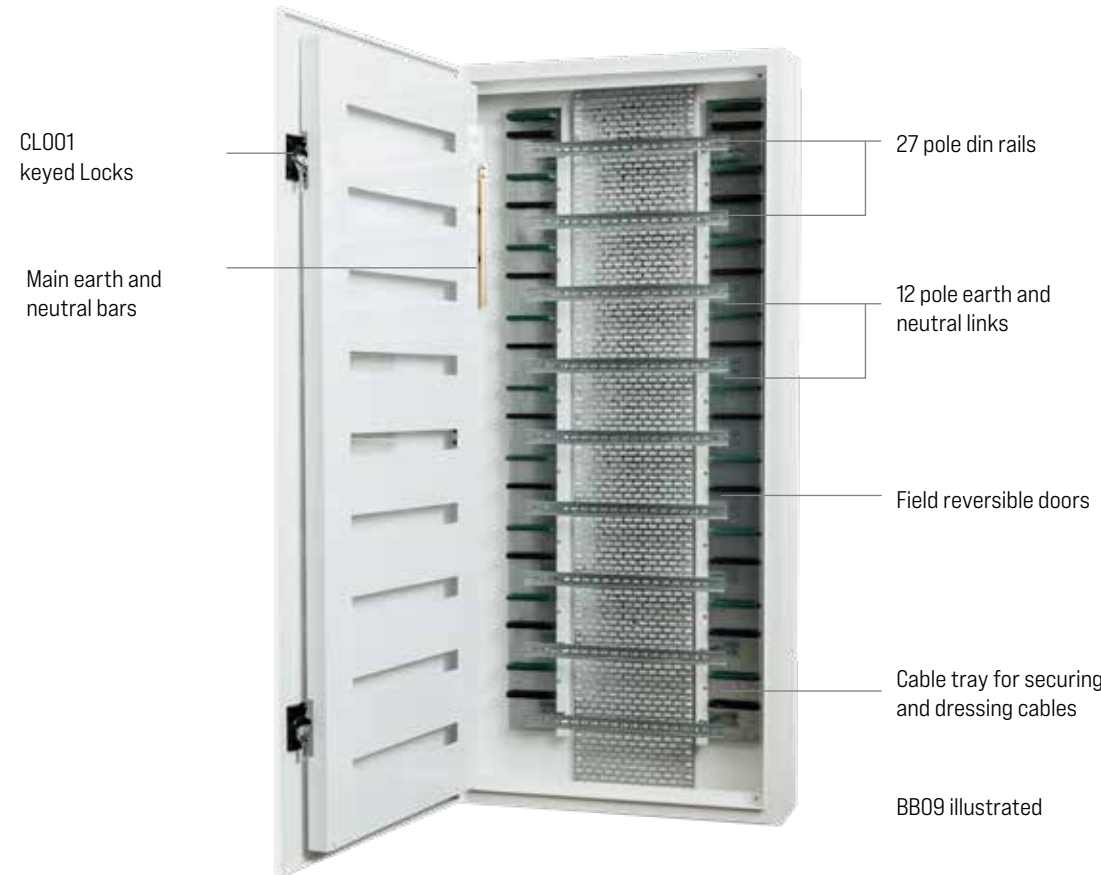

QUICK SELECTION GUIDE

PRODUCT NAME	POLE QUANTITY	POLE DETAILS	SIZE	WEIGHT
BB03	81 POLE	3 x 27 POLE DIN RAIL	600MM H x 800MM W x 220MM D	40 KG
BB06	162 POLE	6 x 27 POLE DIN RAIL	1200MM H x 800MM W x 220MM D	68 KG
BB07	189 POLE	7 x 27 POLE DIN RAIL	1400MM H x 800MM W x 220MM D	79 KG
BB09	243 POLE	9 x 27 POLE DIN RAIL	1800MM H x 800MM W x 220MM D	95 KG

***Colour Prefix**
W = White
BK = Black
Eg: BB06W or BB06BK.
White is the standard
stocked colour.

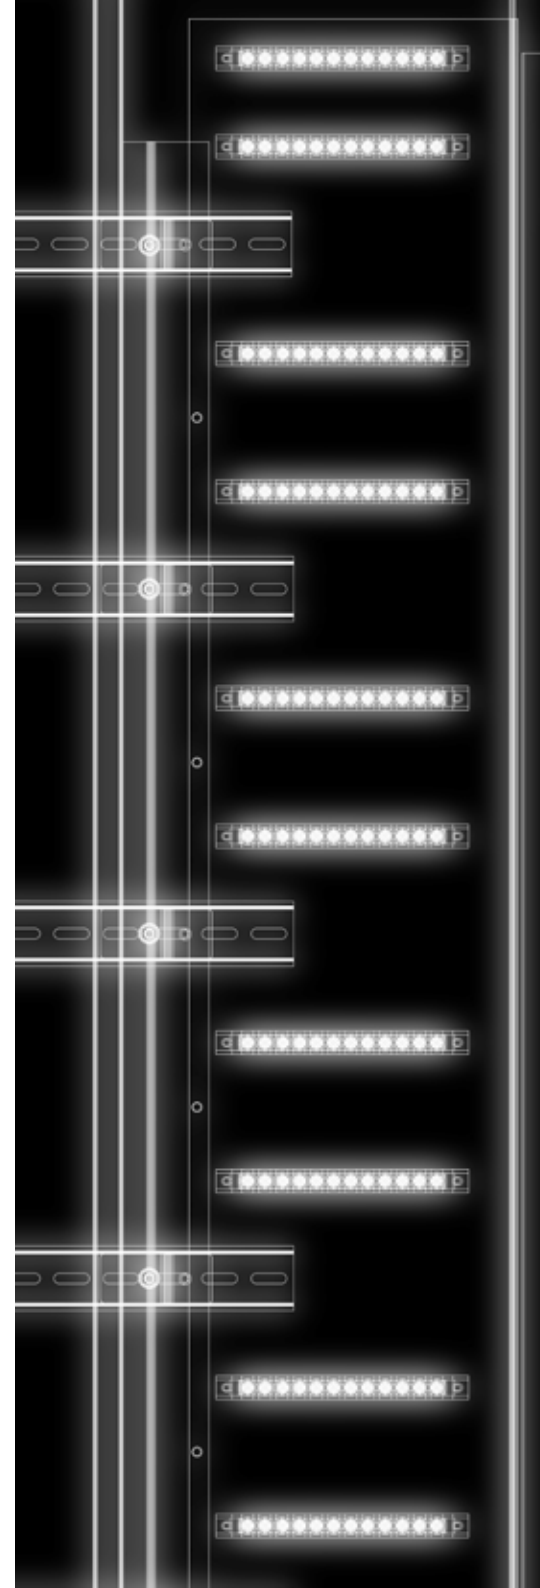

AUTOMATION ENCLOSURE PART# BB03



- 81 Poles over 3 rows of 27 Din rail
- 300MM wide cable tray for cable dressing and securing cables
- Lift off hinges which can be field reversed for opposite door swing
- 6 x individual neutral and 6 x individual earth links



- 24 Pole main earth and neutral bars
- 600MM H x 800MM W x 220MM D
- Removable hinged escutcheon

SPECS

CONSTRUCTION	
ENCLOSURE MATERIAL	1.6MM SHEET METAL
ESCUTCHEON	HINGED, 1.6MM STEEL WITH FIXING SCREWS
DOOR LOCK	1 x FLUSH KEY LOCK CLO01
CABLE ENTRY	TOP/BOTTOM REMOVABLE GLAND PLATES
MOUNTING	SURFACE OR RECESS MOUNT
SIZE	600MM H x 800MM W x 220MM D

TECHNICAL	
DEGREE OF PROTECTION	IP42
BOARD LOCATION	INDOOR
POLES	81 POLES OVER 3 ROWS OF 27 POLE DINRAIL
SURFACE TREATMENT	ZETACOAT PRE TREATMENT & POWDER COATING MINIMUM 120 MICRON
COLOUR	INTERPON WHITE TEXTURA AS STANDARD WHITE GLOSS ESCUTCHEON
HINGES	- MATT BLACK BRASS PINTLE HINGES, LIFT OFF WITH STAINLESS STEEL PINS
BARS AND LINKS	- 24 POLE MAIN EARTH & NEURAL BARS 165A WITH 2 x M8 LUG BOLTS - 6 x 12 POLE SUB EARTH & NEUTRAL LINKS 50A
WEIGHT	40KG

SUPPLIED WITH	
6 x 50MM SNAP BUSHES	
CABLE TIES	
HEAT SHRINK RED WHITE BLUE BLACK AND EARTH	
CIRCUIT INDICATION STICKERS	
CIRCUIT INDICATION CARD	
POLE FILLER STRIPS	
ORDERING INFORMATION	
BB03W	WHITE POWDER COAT

AUTOMATION
ENCLOSURE
PART# BB06




- 162 Poles over 6 rows of 27 Din rail
- 300MM wide cable tray for cable dressing and securing cables
- Lift off hinges which can be field reversed for opposite door swing
- 12 x individual neutral and 12 x individual earth links
- 42 Pole main earth and neutral bars
- 1200MM H x 800MM W x 220MM D
- Removable hinged escutcheon



SPECS

CONSTRUCTION	
ENCLOSURE MATERIAL	1.6MM SHEET METAL
ESCUTCHEON	HINGED, 1.6MM STEEL WITH FIXING SCREWS
DOOR LOCK	1 x FLUSH KEY LOCK CLO01
CABLE ENTRY	TOP/BOTTOM REMOVABLE GLAND PLATES
MOUNTING	SURFACE OR RECESS MOUNT
SIZE	1200MM H x 800MM W x 220MM D
TECHNICAL	
DEGREE OF PROTECTION	IP42
BOARD LOCATION	INDOOR
POLES	162 POLES OVER 6 ROWS OF 27 POLE DINRAIL
SURFACE TREATMENT	ZETACOAT PRE TREATMENT & POWDER COATING MINIMUM 120 MICRON
COLOUR	INTERPON WHITE TEXTURA AS STANDARD WHITE GLOSS ESCUTCHEON
HINGES	- MATT BLACK BRASS PINTLE HINGES, LIFT OFF WITH 2 x M8 LUG BOLTS - STAINLESS STEEL PINS
BARS AND LINKS	- 42 POLE MAIN EARTH & NEURAL BARS 165A WITH - 12 x 12 POLE SUB EARTH & NEUTRAL LINKS 50A
WEIGHT:	68KG

SUPPLIED WITH	
10 x 50MM SNAP BUSHES	
CABLE TIES	
HEAT SHRINK RED WHITE BLUE BLACK AND EARTH	
CIRCUIT INDICATION STICKERS	
CIRCUIT INDICATION CARD	
POLE FILLER STRIPS	
ORDERING INFORMATION	
BB06W	WHITE POWDER COAT

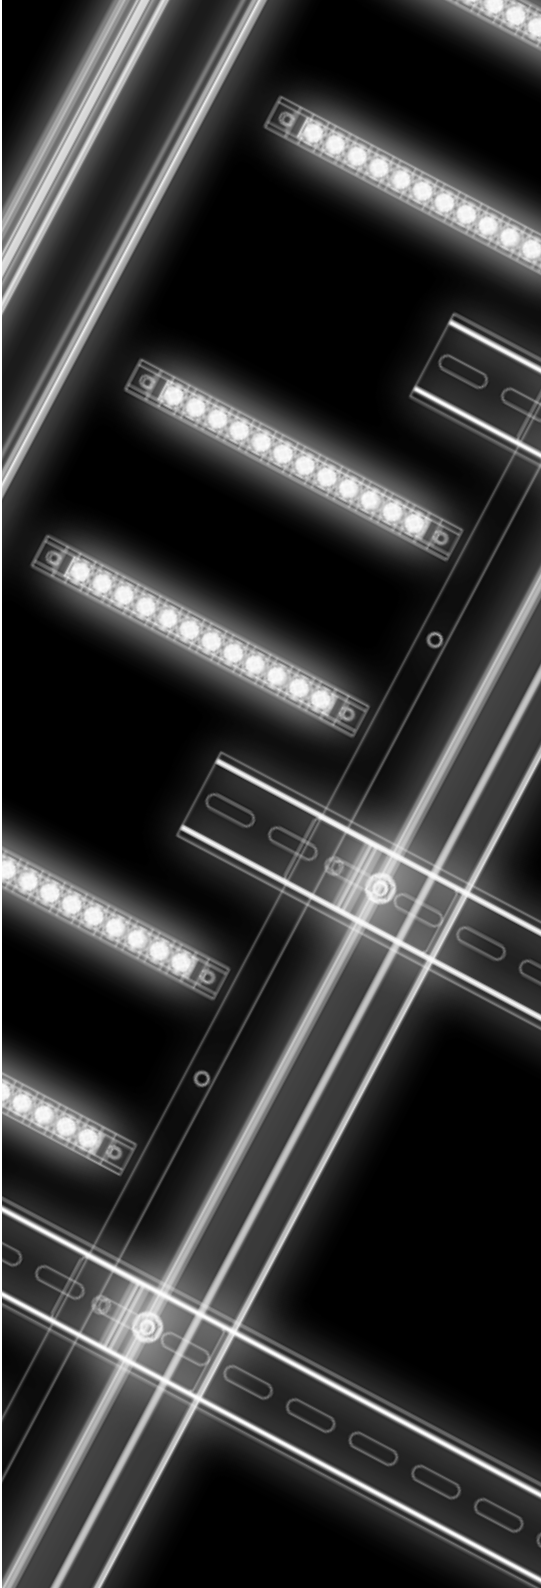

AUTOMATION
ENCLOSURE
PART# BB07



- 189 Poles over 7 rows of 27 Din rail
- 300MM wide cable tray for cable dressing and securing cables
- Lift off hinges which can be field reversed for opposite door swing
- 14 x individual neutral and 14 x individual earth links
- 42 Pole main earth and neutral bars
- 1400MM H x 800MM W x 220MM D
- Removable hinged escutcheon

SPECS

CONSTRUCTION	
ENCLOSURE MATERIAL	1.6MM SHEET METAL
ESCUTCHEON	HINGED, 1.6MM STEEL WITH FIXING SCREWS
DOOR LOCK	2 x FLUSH KEY LOCK CLO01
CABLE ENTRY	TOP/BOTTOM REMOVABLE GLAND PLATES
MOUNTING	SURFACE OR RECESS MOUNT
SIZE	1400MM H x 800MM W x 220MM D

TECHNICAL	
DEGREE OF PROTECTION	IP42
BOARD LOCATION	INDOOR
POLES	189 POLES OVER 7 ROWS OF 27 POLE DINRAIL
SURFACE TREATMENT	ZETACOAT PRE TREATMENT & POWDER COATING MINIMUM 120 MICRON
COLOUR	INTERPON WHITE TEXTURA AS STANDARD WHITE GLOSS ESCUTCHEON
HINGES	- MATT BLACK BRASS PINTLE HINGES, LIFT OFF WITH STAINLESS STEEL PINS
BAR AND LINKS	- 42 POLE MAIN EARTH & NEURAL BARS 165A WITH 2 x M8 LUG BOLTS - 14 x 12 POLE SUB EARTH & NEUTRAL LINKS 50A
WEIGHT	79KG



SUPPLIED WITH	
10 x 50MM SNAP BUSHES	
CABLE TIES	
HEAT SHRINK RED WHITE BLUE BLACK AND EARTH	
CIRCUIT INDICATION STICKERS	
CIRCUIT INDICATION CARD	
POLE FILLER STRIPS	
ORDERING INFORMATION	
BB07W	WHITE POWDER COAT

AUTOMATION
ENCLOSURE
PART# BB09W




- 243 Poles over 9 rows of 27 Din rail
- 300MM wide cable tray for cable dressing and securing cables
- Lift off hinges which can be field reversed for opposite door swing
- 18 x individual neutral and 18 x individual earth links
- 42 Pole main earth and neutral bars
- 1800MM H x 800MM W x 220MM D
- Removable hinged escutcheon



SPECS

CONSTRUCTION	
ENCLOSURE MATERIAL	1.6MM SHEET METAL
ESCUTCHEON	HINGED, 1.6MM STEEL WITH FIXING SCREWS
DOOR LOCK	2 x FLUSH KEY LOCK CLO01
CABLE ENTRY	TOP/BOTTOM REMOVABLE GLAND PLATES
MOUNTING	SURFACE OR RECESS MOUNT
SIZE	800MM H x 800MM W x 220MM D
TECHNICAL	
DEGREE OF PROTECTION	IP42
BOARD LOCATION	INDOOR
POLES	243 POLES OVER 9 ROWS OF 27 POLE DINRAIL
SURFACE TREATMENT	ZETACOAT PRE TREATMENT & POWDER COATING MINIMUM 120 MICRON
COLOUR	INTERPON WHITE TEXTURA AS STANDARD WHITE GLOSS ESCUTCHEON
HINGES	- MATT BLACK BRASS PINTLE HINGES, LIFT OFF WITH STAINLESS STEEL PINS
BARS AND LINKS	- 42 POLE MAIN EARTH & NEURAL BARS 165A WITH 2 x M8 LUG BOLTS - 18 x 12 POLE SUB EARTH & NEUTRAL LINKS 50A
WEIGHT	95KG

SUPPLIED WITH	
12 x 50MM SNAP BUSHES	
5 x 25MM SNAP BUSHES	
CABLE TIES	
HEAT SHRINK RED WHITE BLUE BLACK AND EARTH	
CIRCUIT INDICATION STICKERS	
CIRCUIT INDICATION CARD	
POLE FILLER STRIPS	
ORDERING INFORMATION	
BB09W	WHITE POWDER COAT

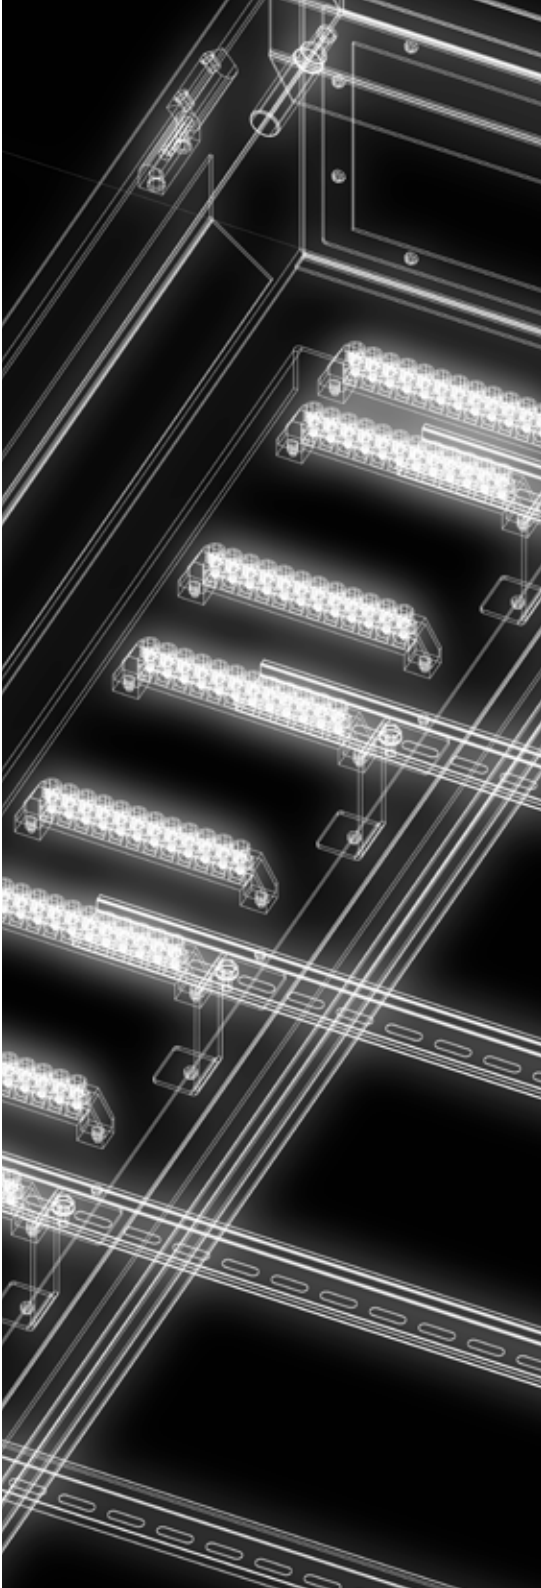

CONTROL 4
AUTOMATION ENCLOSURE
PART# BBC4-8-116P



- 116 Poles Total
- Suits 8 x Control 4 units plus breakers or 9 units maximum @12p each
- Lift off hinges which can be field reversed for opposite door swing
- 8 x individual neutral and 8 x individual earth links
- 42 Pole main earth and neutral bars
- Removable hinged escutcheon

SPECS

CONSTRUCTION	
ENCLOSURE MATERIAL	1.6MM SHEET METAL
ESCUTCHEON:	HINGED 6MM STEEL WITH FIXING SCREWS
DOOR LOCK	1 x FLUSH KEY LOCK CLO01
CABLE ENTRY	TOP/BOTTOM KNOCKOUTS
MOUNTING	SURFACE OR RECESS MOUNT
SIZE	1100MM H x 710MM W x 170MM D

TECHNICAL	
DEGREE OF PROTECTION	IP42
BOARD LOCATION:	INDOOR
POLES:	116 POLES TOTAL
SURFACE TREATMENT:	ZETACOAT PRE TREATMENT & POWDER COATING MINIMUM 120 MICRON
COLOUR:	INTERPON BLACK TEXTURA AS STANDARD WHITE GLOSS ESCUTCHEON
HINGES	- MATT BLACK BRASS PINTLE HINGES, LIFT OFF WITH STAINLESS STEEL PINS
BARS AND LINKS	- 12 POLE MAIN EARTH & NEURAL BARS 90A - 8 x 12 POLE SUB EARTH & NEUTRAL LINKS 50A



SUPPLIED WITH	
12 x 50MM SNAP BUSHES	
CABLE TIES	
HEAT SHRINK RED WHITE BLUE BLACK AND EARTH	
CIRCUIT INDICATION STICKERS	
CIRCUIT INDICATION CARD	
POLE FILLER STRIPS	
ORDERING INFORMATION	
BBC4-8-116P	BLACK POWDER COAT

INDUSTRIAL ENCLOSURES IP66



BBE Series IP66 Industrial Enclosures

This range comes in a powder-coated galvanised steel finish with custom sizes available to order. Our enclosures conform to EN 62208/AS/NZS 62208 & IEC 60529/AS/NZS 60529 – IP66

- Double Bar Chrome Lock.
- RAL 7035 Grey Ripple Powder Coating.
- Galvanised Steel Construction.
- 2.0mm Galvanised steel gear tray.
- Injected foam Door and Gland Plate Seals.
- Supplied with wall mounting brackets.


Rain Hoods-

Rain hoods are used in situations where settling and building up of particles, dust and debris, chemicals or liquids may cause damage to the enclosure and will then effect its IP rating. The rain hood angle helps reduce this.

Distribution Board Inserts-

Our Distribution boards inserts are available in two sizes, 30 and 45 pole. These inserts quickly cover the matching IP66 enclosure size into a din rail enclosure within minutes.

PART NUMBER	DESCRIPTION	OPTIONAL EXTRAS
BBE303021ST	300H X 300W X 210D, GALVANISED STEEL, GREY IP66	
BBE404020ST	400H X 400W X 200D , GALVANISED STEEL, GREY IP66	RAIN HOOD, DISTRIBUTION BOARD INSERT 30 POLE 2 X 15 POLE
BBE504020ST	500H X 400W X 200D , GALVANISED STEEL, GREY IP66	RAIN HOOD
BBE604020ST	600H X 400W X 200D , GALVANISED STEEL, GREY IP66	RAIN HOOD, DISTRIBUTION BOARD INSERT 45 POLE 3 X 15 POLE
BBE606020ST	600H X 600W X 200D , GALVANISED STEEL, GREY IP66	RAIN HOOD
BBE705025ST	700H X 500W X 250D, GALVANISED STEEL, GREY IP66	
BBE806020ST	800H X 600W X 200D, GALVANISED STEEL, GREY IP66	RAIN HOOD
BBE806040ST	800H X 600W X 400D, GALVANISED STEEL, GREY IP66	
BBE808020ST	800H X 800W X 200D, GALVANISED STEEL, GREY IP66	RAIN HOOD
BBE1208030ST	1200H X 800W X 300D, GALVANISED STEEL, GREY IP66	
OPTIONAL ACCESSORIES		
BBERH40/20	RAIN HOOD TO SUIT 400 WIDE X 200 DEEP ENCLOSURES	
BBERH60/20	RAIN HOOD TO SUIT 600 WIDE X 200 DEEP ENCLOSURES	
BBERH80/20	RAIN HOOD TO SUIT 800 WIDE X 200 DEEP ENCLOSURES	
BBEDB40/40-30P	DISTRIBUTION BOARD INSERT TO SUIT 400X400X200 – 30 POLE	
BBEDB60/40-45P	DISTRIBUTION BOARD INSERT TO SUIT 600X400X200 – 45 POLE	

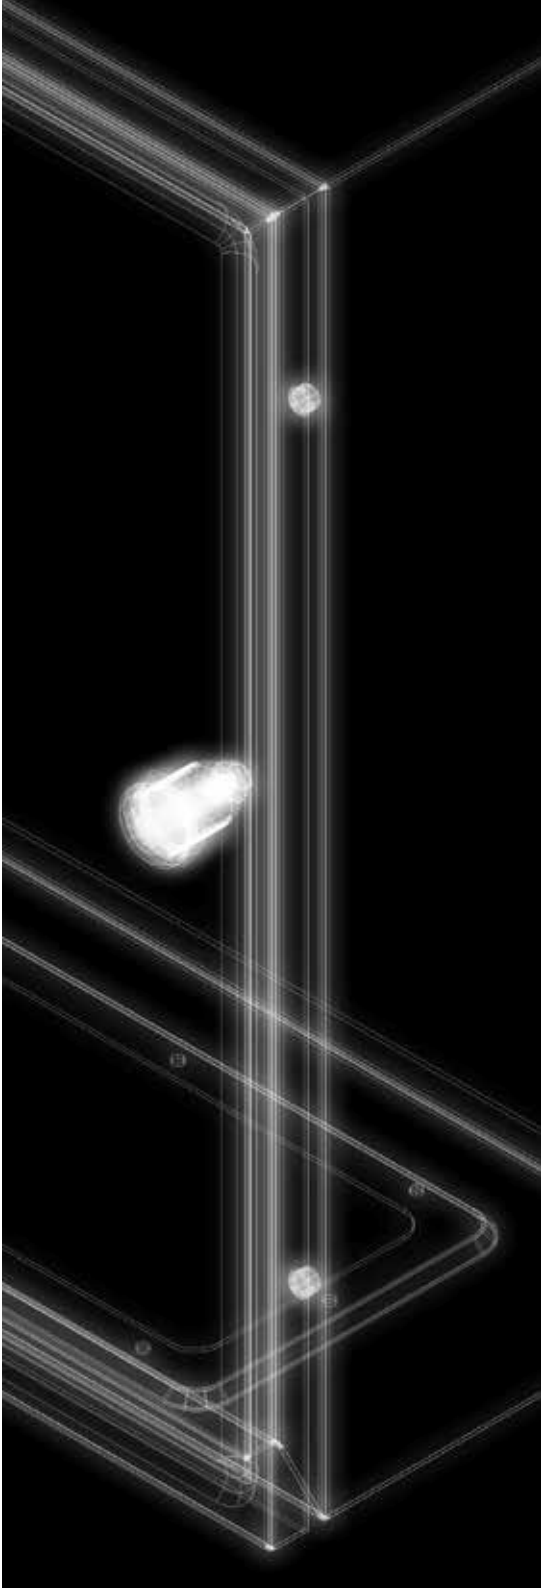

PART# BITSABOX



The BITSABOX is one very tough screw box.

Built tough from 1.2MM galvanised steel with heavy duty flight case hardware.

Two removable trays with rubber feet.




Flightcase hardware



Heavy duty galvanised steel

Fully welded construction

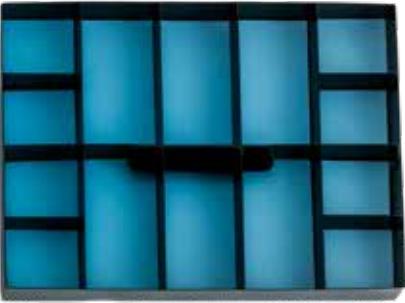


Two removable trays with rubber feet



SPECS

TECHNICAL	
BITSABOX MATERIAL	1.2MM GALVANISED SHEET METAL BOX & 1.0MM TRAYS
COLOUR	BLACK RIPPLE POWDER COAT
CONSTRUCTION	FULLY WELDED
SIZE	420MM W x 320MM D x 210MM H
LATCHES	2 x FLIGHT CASE BUTTERFLY CHROME TURN LATCHES
HANDLE	SPRING LOADED FOLDING FLIGHTCASE HANDLE WITH RUBBER GRIP
LININGS	3MM SELF-ADHESIVE BLUE FELT
WEIGHT	12KG



BUILT
BOARDS

T 03 8510 8943
F 03 9580 4346
E sales@builtboards.com.au
W builtboards.com.au